



**400+** WINTER TYRES SIZES

**130+** ALL SEASON TYRES SIZES

ROADMARCH TYRE CO., LTD

0086-0532-67788675

info@roadmarchtyre.com

www.roadmarchtyre.com



**ROADMARCH** TYRES  
MARCHING WITH PASSION

 **WINTER**



**ROADMARCH** TYRES

PCR CATALOGUE

## INTRODUCTION:

ROADMARCH brand belongs to the specialized and large-scale technology-oriented tire manufacturer ZODO Tire Co., Ltd, famous for producing full range of car tyres including: PCR, UHP, SUV, VAN, LT, etc.


- 3.5 billion investment
- 430,000 square meters
- 4000+ workers
- Production capacity: car tyres 28 million per year
- Technology from Goodyear
- Key production and testing equipment imported from Japan, Germany, the USA, etc.
- Raw material from worldwide top suppliers
- Management and technical personnel with over 15 years experience
- Sales network at home and abroad, exported to over 180 countries
- Quality approved by global standards: ISO9001, CCC, DOT, ECE, GCC, BIS, INMETRO, SGS, etc.

ROADMARCH as a creative brand with exclusive pattern designs, will certainly help the worldwide partners develop more and more business. Marching with passion!

## CONTENTS

Introduction .....	01
Contents .....	02
Pattern Selection Guide .....	03
WINTER .....	05
ALL SEASON .....	23
Certificates .....	29
Exhibitions .....	29
Tyre Sidewall Descriptions .....	30

**Pattern Selection Guide**

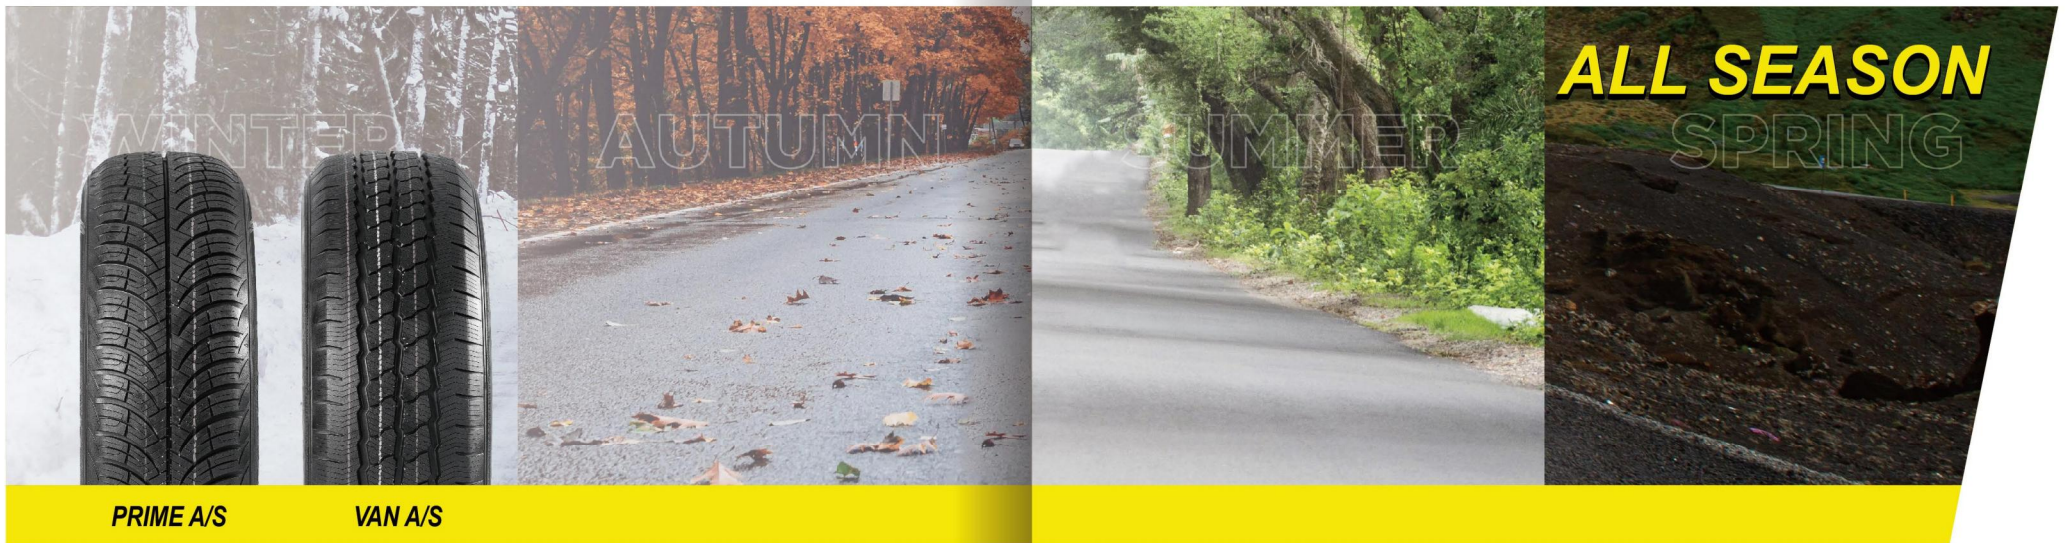



**WINTER**




**WINTER X PRO STUDS 68    WINTER X PRO STUDS 69    WINTER X PRO STUDS 77    WINTER X PRO 888**




**WINTER X PRO 999    SNOW ROVER 989    SNOW ROVER 966    SNOW ROVER 868**

**NEW**

# WINTER X PRO STUDS 68



Performance test:




### M+S

RIM SIZE	13 - 16
SERIES	50 - 75
SPEED RATING	H - T

Near square footprint design. Large footprint area and even grounding pressure, improved the braking and starting performance of the tyre.

The continuous pattern design at the center improves the straight-line driving performance of the tyre, improves the directional stability, and improves the driving safety of the vehicle.

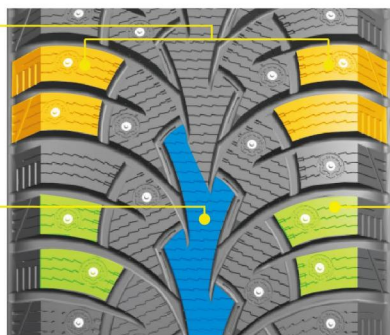


Wider driving surface width and square shoulder design. The footprint of the tyre is increased, and the grip of the tyre is improved.

The wide tread block design of the shoulder ensures the overall rigidity of the tyre on the ice and snow road, and improves the handling performance; Improve the handling performance of tyres on ice.


Inch	Size	LI/SR	P.R.	Tread Depth	Std.	SW	OD	Max Load (kg)	Max Pressure (LBS)	UTQG	Sidewall	0	0	Noise	A	
				(mm)	Rim	(mm)	(mm)									
13'	155/70R13	75T	-	9.3	4.50B	157	548	387	853	300/44	-	-	-	-	-	-
	175/70R13	82T	-	9.3	5.00B	177	576	475	1047	300/44	-	-	-	-	-	-
	175/65R14	86T XL	-	9.3	5J	177	584	530	1168	340/50	-	-	-	-	-	-
14'	175/70R14	84T	-	9.3	5J	177	602	500	1102	300/44	-	-	-	-	-	-
	185/60R14	82T	-	9.3	5 1/2J	189	578	475	1047	300/44	-	-	-	-	-	-
	185/65R14	90T XL	-	9.3	5 1/2J	189	596	600	1323	340/50	-	-	-	-	-	-
	185/70R14	92T XL	-	9.3	5 1/2J	189	616	630	1389	340/50	-	-	-	-	-	-
	185/55R15	86T XL	-	9.3	6J	194	585	530	1168	340/50	-	-	-	-	-	-
	185/60R15	88T XL	-	9.3	5 1/2J	189	603	560	1235	340/50	-	-	-	-	-	-
15'	185/65R15	88T	-	9.3	5 1/2J	189	621	560	1235	300/44	-	-	-	-	-	-
	195/55R15	85H	-	9.3	6J	201	595	515	1135	300/44	-	-	-	-	-	-
	195/60R15	92T XL	-	9.3	6J	201	615	630	1389	340/50	-	-	-	-	-	-
	195/65R15	95TXL	-	9.3	6J	201	635	690	1521	340/50	-	-	-	-	-	-
	205/65R15	94T	-	9.3	6J	209	647	670	1477	300/44	-	-	-	-	-	-
	195/55R16	91TXL	-	9.3	6J	201	620	615	1356	340/50	-	-	-	-	-	-
16'	205/55R16	94T XL	-	9.3	6 1/2J	214	632	670	1477	340/50	-	-	-	-	-	-
	205/60R16	96T XL	-	9.3	6J	209	652	710	1565	340/50	-	-	-	-	-	-
	205/65R16	95T	-	9.3	6J	209	672	690	1519	300/44	-	-	-	-	-	-
	215/55R16	97T XL	-	9.3	7J	226	642	730	1609	340/50	-	-	-	-	-	-
	215/60R16	99T XL	-	9.3	6 1/2J	221	664	775	1709	340/50	-	-	-	-	-	-
	215/65R16	102TXL	-	9.3	6 1/2J	221	686	850	1874	340/50	-	-	-	-	-	-
14'	155/65R14	75T	-	9.3	4 1/2J	157	558	387	853	300/44	-	-	-	-	-	-
	175/65R15	84T	-	9.3	5J	177	609	500	1102	300/44	-	-	-	-	-	-
	195/50R15	82T	-	9.3	6J	201	577	475	1047	300/44	-	-	-	-	-	-
15'	205/70R15	96T	-	9.3	6J	209	669	710	1565	300/44	-	-	-	-	-	-
	225/55R16	99T XL	-	9.3	7J	233	654	775	1709	340/50	-	-	-	-	-	-
	225/50R16	96TXL	-	9.3	7J	233	632	710	1565	340/50	-	-	-	-	-	-
	225/60R16	98T	-	9.3	6 1/2J	228	676	750	1653	300/44	-	-	-	-	-	-
	225/65R16	100T	-	9.3	6 1/2J	228	698	800	1764	300/44	-	-	-	-	-	-

**NEW**

# WINTER X PRO STUDS 69




Performance test:




**M+S**

RIM SIZE	17 - 22
SERIES	35 - 60
SPEED RATING	H - T

● **Studded design.**  
The single guiding pattern is arranged with 90 left and right nail holes per meter to ensure the vehicle's strong grip on the ice surface under the extreme cold temperature.



● **Ice crystal snowflake nail hole protection design.**  
A snowflake mark of  $\geq 7$ mm is set around the insert to completely fill the rubber, enhance the rigidity of the tread block around the nail, and prevent the insert from falling or the nail hole from being torn during driving.



● **The 11mm deep nail hole design, together with the special light truck insert, improves the ice grip performance under light truck load, and prevents the insert from falling.**



● **Velvet sidewall logo design.**  
The design of cars is becoming more and more beautiful, and the requirements for the appearance of tyres are also getting higher and higher.


● **The snowflake mark makes the position of the stud more obvious.**

Inch	Size	LI/SR	P.R.	Tread Depth	Std.	SW	OD	Max Load	Max Pressure	UTQG	Sidewall	0	0	Noise	0
				(mm)	Rim	(mm)	(kg)	(LBS)	(kPa/PSI)						
17'	205/50R17	93T XL	-	10.3	6 1/2J	214	638	650	1433	340/50	-	-	-	-	-
	205/55R17	95TXL	-	10.3	6 1/2J	214	658	690	1519	340/50	-	-	-	-	-
	215/45R17	91TXL	-	10.3	7	213	626	615	1354	340/50	-	-	-	-	-
	215/50R17	95T XL	-	10.3	7	226	648	690	1521	340/50	-	-	-	-	-
	215/55R17	98T XL	-	10.3	7	226	668	750	1653	340/50	-	-	-	-	-
	225/45R17	94H XL	-	10.3	7 1/2J	225	634	670	1477	340/50	-	-	-	-	-
	225/50R17	98H XL	-	10.3	7	233	658	750	1653	340/50	-	-	-	-	-
	225/55R17	101HXL	-	10.3	7	233	680	825	1819	340/50	-	-	-	-	-
	235/45R17	97TXL	-	10.3	8 1	236	644	730	1607	340/50	-	-	-	-	-
	235/55R17	103TXL	-	10.3	7 1/2J	245	690	875	1926	340/50	-	-	-	-	-
	215/55R18	95T	-	10.3	7	226	693	690	1521	300/44	-	-	-	-	-
	225/40R18	92TXL	-	10.3	8	230	637	630	1389	340/50	-	-	-	-	-
225/45R18	95T XL	-	10.3	7 1/2J	225	659	690	1521	340/50	-	-	-	-	-	
225/50R18	99TXL	-	10.3	7	233	683	775	1706	340/50	-	-	-	-	-	
225/55R18	102TXL	-	10.3	7 1	233	705	850	1871	340/50	-	-	-	-	-	
235/45R18	96TXL	-	10.3	8	236	669	750	1653	340/50	-	-	-	-	-	
235/50R18	101TXL	-	10.3	7 1/2J	245	693	825	1816	340/50	-	-	-	-	-	
245/40R18	97T XL	-	10.3	8 1/2J	248	653	730	1607	340/50	-	-	-	-	-	
245/45R18	100T XL	-	10.3	8	243	677	800	1764	340/50	-	-	-	-	-	
255/35R18	94TXL	-	10.3	9	260	635	670	1477	340/50	-	-	-	-	-	
255/40R18	99TXL	-	10.3	9	260	661	775	1709	340/50	-	-	-	-	-	
265/35R18	97TXL	-	10.3	9 1/2J	271	643	730	1607	340/50	-	-	-	-	-	
275/40R18	103TXL	-	10.3	9 1/2J	278	677	875	1929	340/50	-	-	-	-	-	
225/40R19	93T XL	-	10.3	8	230	663	650	1433	340/50	-	-	-	-	-	
225/55R19	103TXL	-	10.3	7 1	233	731	875	1926	340/50	-	-	-	-	-	
235/35R19	91TXL	-	10.3	8 1/2J	241	647	615	1356	340/50	-	-	-	-	-	
235/40R19	96T XL	-	10.3	8 1/2J	241	671	710	1565	340/50	-	-	-	-	-	
235/50R19	103TXL	-	10.3	7 1/2J	245	719	875	1926	340/50	-	-	-	-	-	
245/40R19	98TXL	-	10.3	8 1/2J	248	679	750	1651	340/50	-	-	-	-	-	
245/45R19	98T	-	10.3	8	243	703	750	1653	300/44	-	-	-	-	-	
255/35R19	96T XL	-	10.3	9	260	661	710	1565	340/50	-	-	-	-	-	
255/40R19	100T XL	-	10.3	9	260	687	800	1761	340/50	-	-	-	-	-	
255/45R19	104T XL	-	10.3	8 1/2J	255	713	900	1981	340/50	-	-	-	-	-	
255/50R19	103T	-	10.3	8	265	739	875	1929	300/44	-	-	-	-	-	
275/35R19	100T XL	-	10.3	9 1/2J	278	675	800	1761	340/50	-	-	-	-	-	
275/40R19	105TXL	-	10.3	9 1/2J	278	703	925	2039	340/50	-	-	-	-	-	
285/45R19	111TXL	-	10.3	9 1/2J	285	739	1090	2400	340/50	-	-	-	-	-	
235/55R20	102T	-	10.3	7 1/2J	245	766	850	1871	300/44	-	-	-	-	-	
245/40R20	99TXL	-	10.3	8 1/2J	248	704	775	1706	340/50	-	-	-	-	-	
245/45R20	103TXL	-	10.3	8	243	728	875	1929	340/50	-	-	-	-	-	
245/50R20	105TXL	-	10.3	7 1/2J	253	754	925	2036	340/50	-	-	-	-	-	
255/35R20	97TXL	-	10.3	9	260	686	730	1607	340/50	-	-	-	-	-	
255/40R20	101TXL	-	10.3	9	260	712	825	1819	340/50	-	-	-	-	-	
255/45R20	101T	-	10.3	8 1/2J	255	738	825	1819	300/44	-	-	-	-	-	
255/50R20	109TXL	-	10.3	8	265	764	109	240	340/50	-	-	-	-	-	
255/55R20	110TXL	-	10.3	8	265	788	1060	2334	340/50	-	-	-	-	-	
265/50R20	107T	-	10.3	8 1/2J	277	774	975	2149	300/44	-	-	-	-	-	
275/35R20	102TXL	-	10.3	9 1/2J	278	700	850	1871	340/50	-	-	-	-	-	
275/40R20	102T	-	10.3	9 1/2J	278	728	850	1874	300/44	-	-	-	-	-	
275/45R20	110T XL	-	10.3	9	273	756	1060	2337	340/50	-	-	-	-	-	
275/50R20	113TXL	-	10.3	8 1/2J	284	784	1150	2535	340/50	-	-	-	-	-	
285/50R20	112T	-	10.3	9	297	794	1120	2469	300/44	-	-	-	-	-	
305/40R20	112T XL	-	10.3	11J	313	752	1120	2469	340/50	-	-	-	-	-	
315/35R20	106T	-	10.3	11J	320	728	950	2094	300/44	-	-	-	-	-	
275/40R21	107TXL	-	10.3	9 1/2J	278	753	975	2147	340/50	-	-	-	-	-	
275/45R21	110T XL	-	10.3	9	273	781	1060	2334	340/50	-	-	-	-	-	
285/40R21	109T XL	-	10.3	10	290	761	1030	2271	340/50	-	-	-	-	-	
285/45R21	113T XL	-	10.3	9 1/2J	285	789	1030	2268	340/50	-	-	-	-	-	
295/35R21	107TXL	-	10.3	10 1/2J	301	739	975	2149	340/50	-	-	-	-	-	
295/40R21	107T	-	10.3	10 1/2J	301	769	975	2149	300/44	-	-	-	-	-	
315/35R21	111T XL	-	10.3	11J	320	753	1090	2403	340/50	-	-	-	-	-	
315/40R21	111T	-	10.3	11J	320	785	1090	2403	300/44	-	-	-	-	-	
275/40R22	107TXL	-	10.3	9 1/2J	278	779	975	2147	340/50	-	-	-	-	-	
285/45R22	114TXL	-	10.3	9 1/2J	285	815	1180	2598	340/50	-	-	-	-	-	
275/50R22	115TXL	-	10.3	8 1/2J	284	835	1215	2675	340/50	-	-	-	-	-	
315/35R22	111TXL	-	10.3	11J	320	779	1090	2403	340/50	-	-	-	-	-	
20'	265/55R20	113T XL	-	10.3	8 1/2J	277	800	1150	2535	340/50	-	-	-	-	-
17'	245/40R17	95T XL	-	10.3	8 1/2J	248	628	690	1521	340/50	-	-	-	-	-
19'	245/35R19	93T XL	-	10.3	8 1/2J	248	655	650	1433	340/50	-	-	-	-	-
20'	275/30R20	97T XL	-	10.3	9 1/2J	278	674	730	1609	340/50	-	-	-	-	-
20'	245/35R20	95T XL	-	10.3	8 1/2J	248	680	690	1521	340/50	-	-	-	-	-


WINTER

**NEW**

# WINTER X PRO STUDS 77




Performance test:



**M+S**

RIM SIZE	16 - 20
SERIES	55 - 75
SPEED RATING	T

The crisscrossing pattern groove form with a high proportion of sea-land ratio improves the comprehensive snow removal and drainage performance of tyres on ice and snow roads, enhances the traction of tyres in the driving surface, increases the braking performance of tyres, and improves the safety performance of vehicles.

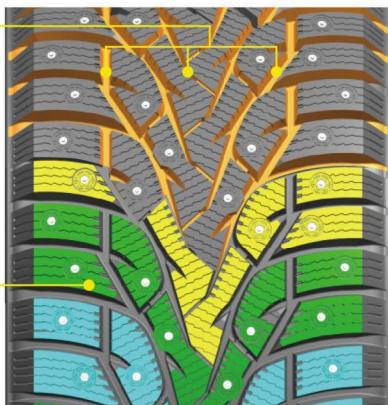

Silent pattern design. The pitch design of the two-in-one composite design and the interactive pattern groove design in the center position are helpful to reducing the pattern noise of the tyre in the high-speed state.

- Widened horizontal and longitudinal grooves can effectively improve the snow removal ability of tyres in snowy conditions and enhance the snow safety of vehicles.

- Velvet sidewall logo design. The design of cars is becoming more and more beautiful, and the requirements for the appearance of tyres are also getting higher and higher. Therefore, the font of the trademark and product line on the tyre are designed with velvet to highlight the grade of the tyre.

Inch	Size	LI/SR	P.R.	Tread Depth	Std.	SW	OD	Max Load	Max Pressure	UTQG	Sidewall	Rolling Resistance	Noise
				(mm)	Rim	(mm)	(mm)	(kg)	(LBS)				
16'	215/70R16	100T	-	9.3	6 1/2J	221	708	800	1764	300/44	-	-	-
	225/70R16	107TXL	-	10.3	6 1/2J	228	722	975	2149	340/50	-	-	-
	245/70R16	111TXL	-	10.3	7 J	248	750	1090	2403	340/50	-	-	-
	215/60R17	100TXL	-	10.3	6 1/2J	221	690	800	1761	340/50	-	-	-
	215/65R17	103TXL	-	10.3	6 1/2J	221	712	875	1929	340/50	-	-	-
17'	225/60R17	103T XL	-	10.3	6 1/2J	228	702	875	1926	340/50	-	-	-
	225/65R17	106TXL	-	10.3	6 1/2J	228	724	950	2094	340/50	-	-	-
	235/65R17	108TXL	-	10.3	7J	240	738	1000	2205	340/50	-	-	-
	265/65R17	112T	-	10.3	8J	272	776	1120	2469	300/44	-	-	-
	225/60R18	104TXL	-	10.3	6 1/2J	228	727	900	1981	340/50	-	-	-
18'	235/55R18	104TXL	-	10.3	7 1/2J	245	715	900	1981	340/50	-	-	-
	235/60R18	103T	-	10.3	7J	240	739	875	1929	300/44	-	-	-
	245/60R18	109TXL	-	10.3	7 J	248	751	1030	2268	340/50	-	-	-
	255/55R18	109TXL	-	10.3	8 J	265	737	1030	2268	340/50	-	-	-
	265/60R18	114TXL	-	10.3	8 J	272	775	1180	2598	340/50	-	-	-
19'	235/55R19	105TXL	-	10.3	7 1/2J	245	741	925	2039	340/50	-	-	-
	245/55R19	107TXL	-	10.3	7 1/2J	253	753	975	2147	340/50	-	-	-
	255/55R19	107T	-	10.3	8J	265	763	975	2149	300/44	-	-	-
	275/55R20	117TXL	-	10.3	8 1/2J	284	810	1285	2829	340/50	-	-	-
	185/75R16C	104/102R	8PR	11.3	5J	184	684	900/850	1985/1875	475/69	-	-	-
16'	195/75R16C	107/105R	8PR	11.3	5 1/2J	196	698	975/925	2150/2040	475/69	-	-	-
	225/75R16C	116/114R	8PR	11.3	6J	223	744	1250/1180	2755/2600	475/69	-	-	-
	LT225/75R16	115/112Q	10PR	11.3	6J	223	744	1215/1120	2680/2470	550/80	-	-	-
	235/65R16C	121/119R	-	11.3	7J	240	712	1450/1360	3197/2998	575/83	-	-	-
	245/75R16	111T	-	11.3	5J	248	774	1090	2403	300/44	-	-	-
17'	LT245/75R16	120/116Q	10PR	11.3	7J	248	774	1380/1160	3042/2778	550/80	-	-	-
	265/70R17	115T	-	11.3	8J	272	804	1215	2679	300/44	-	-	-
	LT265/70R17	121/118Q	10PR	11.3	8J	272	804	1450/1320	3197/2910	550/80	-	-	-
	275/65R18	116T	-	10.3	10 J	8 J	279	815	1797	300/44	-	-	-
	LT275/65R18	123/120Q	10PR	10.3	8J	279	815	1550/1400	3417/3086	550/80	-	-	-
20'	275/60R20	115T	-	10.3	8J	279	838	1215	2679	300/44	-	-	-
	LT275/60R20	123/120Q	10PR	10.3	8J	279	838	1550/1400	3417/3086	550/80	-	-	-
	285/60R18	116T	-	10.3	8 1/2J	292	799	1250	2756	300/44	-	-	-
	235/70R16	106T	-	10.3	7J	240	736	950	2094	300/44	-	-	-
	225/65R16C	112/110R	8PR	11.3	6.5	228	698	1120/1060	2469/2337	475/69	-	-	-
18'	255/70R18	113T	-	10.3	7 1/2J	260	815	1150	2535	300/44	-	-	-
	245/65R17	111T XL	-	10.3	7 J	248	750	1090	2403	340/50	-	-	-
	255/65R17	110T	-	10.3	7 1/2J	260	764	1060	2337	300/44	-	-	-
	265/65R18	116T XL	-	10.3	8J	272	801	1250	2756	340/50	-	-	-
	235/60R17	102T	-	10.3	7 J	240	714	850	1874	300/44	-	-	-
17'	LT245/70R17	119/116Q	10PR	11.3	7 J	248	776	1360/1250	3000/2755	550/80	-	-	-

WINTER


**HOT**

# WINTERXPRO 888




**M+S**

RIM SIZE	13 - 20
SERIES	35 - 80
SPEED RATING	T - V



Performance test:



Reduced stopping distance on snow & ice.

Enhanced snow traction.



- Combination of 2D sipes in the center and 3D sipes in the shoulder area of the tread pattern provide excellent braking performance for reduced stopping distance on snow and ice covered roads.


- Zig-zag grooves with angular edges improve grip between snow in grooves and snow on road.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Pressure (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall	U	T	W	Noise	
13'	145/70R13	71T	-	7.8	4.508	150	534	345	761	300/44	-	B	D	D	68	B	
13'	145/80R13	75T	-	7.8	4.008	145	562	387	853	300/44	-	B	D	D	68	B	
13'	155/65R13	73T	-	7.8	4.508	157	532	365	805	300/44	-	B	D	D	68	B	
13'	155/70R13	75T	-	7.8	4.508	157	548	387	853	300/44	-	B	D	D	68	B	
13'	165/60R13	79T	-	7.8	4.508	157	578	437	963	300/44	-	B	D	D	68	B	
13'	165/70R13	79T	-	8	5.008	170	562	437	963	300/44	-	B	D	D	68	B	
13'	165/80R13	83T	-	8	4.508	165	594	487	1074	300/44	-	B	D	D	68	B	
13'	175/55R13	80T	-	8	5.008	177	578	475	1047	300/44	-	B	D	D	68	B	
13'	175/70R13	82T	-	8	5.008	177	576	475	1047	300/44	-	B	D	D	68	B	
13'	155/65R14	75T	-	7.8	4.1/2J	157	558	387	853	300/44	-	B	D	D	68	B	
13'	165/60R14	75H	-	8	5	170	554	387	853	300/44	-	B	D	D	68	B	
13'	165/65R14	79T	-	8	5	170	570	437	963	300/44	-	B	D	D	68	B	
13'	165/70R14	81T	-	8	5	170	588	462	1019	300/44	-	B	D	D	68	B	
13'	175/65R14	78T	-	8	5	177	584	475	1047	300/44	-	B	D	D	68	B	
13'	175/70R14	84T	-	8	5	177	602	500	1102	300/44	-	B	D	D	68	B	
14'	185/55R14	80H	-	8	6	194	560	450	992	300/44	-	B	D	D	69	B	
14'	185/60R14	82T	-	8	5 1/2J	189	578	475	1047	300/44	-	B	D	D	69	B	
14'	185/65R14	86T	-	8	5 1/2J	189	596	530	1168	300/44	-	B	D	D	69	B	
14'	185/70R14	88T	-	8	5 1/2J	189	616	560	1235	300/44	-	B	C	D	69	B	
14'	195/60R14	86H	-	8.3	6J	201	590	530	1168	300/44	-	B	C	D	69	B	
14'	195/65R14	89H	-	8.3	6J	201	610	580	1279	300/44	-	B	C	D	69	B	
14'	195/70R14	91T	-	8.3	6J	201	630	615	1356	300/44	-	B	C	D	69	B	
14'	165/60R15	81HXL	-	8	5	170	579	462	1019	340/50	-	B	D	D	68	B	
14'	165/65R15	81T	-	8	5	170	595	462	1019	300/44	-	B	D	D	68	B	
14'	175/55R15	77H	-	8	5 1/2J	182	573	412	908	300/44	-	B	D	D	68	B	
14'	175/60R15	81H	-	8	5	177	591	462	1019	300/44	-	B	D	D	68	B	
14'	175/65R15	84T	-	8	5	177	609	500	1102	300/44	-	B	D	D	68	B	
14'	185/55R15	82H	-	8	6	194	585	475	1047	300/44	-	B	D	D	68	B	
14'	185/60R15	84H	-	8	5 1/2J	189	603	500	1102	300/44	-	B	D	D	68	B	
14'	185/65R15	88T	-	8	5 1/2J	189	621	560	1235	300/44	-	B	C	D	69	B	
14'	195/50R15	82V	-	8.3	6J	201	577	475	1047	300/44	-	B	D	D	69	B	
14'	195/55R15	85H	-	8.3	6J	201	595	515	1135	300/44	-	B	D	D	69	B	
14'	195/60R15	88H	-	8.3	6J	201	615	650	1235	300/44	-	B	D	D	69	B	
14'	195/65R15	95TXL	-	8.3	6J	201	635	690	1521	340/50	-	B	C	D	69	B	
14'	205/60R15	91H	-	8.3	6J	209	627	615	1356	300/44	-	B	C	D	69	B	
14'	205/65R15	94T	-	8.3	6J	209	647	670	1477	300/44	-	B	C	D	69	B	
14'	205/70R15	96T	-	8.3	6J	209	669	669	1659	300/44	-	B	C	D	69	B	
14'	215/65R15	96H	-	8.3	6 1/2J	221	661	710	1565	300/44	-	B	C	D	69	B	
14'	185/50R16	81V	-	8	6	194	592	462	1019	300/44	-	B	D	D	69	B	
14'	185/55R16	83H	-	8	6	194	610	487	1074	300/44	-	B	D	D	69	B	
14'	185/60R16	86H	-	8	5 1/2J	189	628	630	1168	300/44	-	B	D	D	69	B	
14'	195/45R16	84VXL	-	8.3	6 1/2J	195	582	500	1102	340/50	-	B	C	D	69	B	
14'	195/50R16	84V	-	8.3	6J	201	602	500	1102	300/44	-	B	C	D	69	B	
14'	195/55R16	91HXL	-	8.3	6J	201	620	615	1356	340/50	-	B	C	D	69	B	
14'	205/45R16	87VXL	-	8.3	7J	206	590	545	1201	340/50	-	B	C	D	69	B	
14'	205/50R16	91VXL	-	8.3	6 1/2J	214	612	615	1356	340/50	-	B	C	D	69	B	
14'	205/55R16	91H	-	8.3	6 1/2J	214	632	615	1356	300/44	-	B	C	D	69	B	
14'	205/60R16	92H	-	8.3	6J	209	652	630	1389	300/44	-	B	C	D	69	B	
14'	205/65R16	95H	-	8.3	6J	209	672	690	1521	300/44	-	B	C	D	69	B	
14'	215/45R16	90VXL	-	8.3	7J	213	600	600	1323	340/50	-	B	C	D	69	B	
14'	215/55R16	97HXL	-	8.3	7J	226	642	730	1609	340/50	-	B	C	D	69	B	
14'	215/60R16	99HXL	-	8.3	6 1/2J	221	664	775	1709	340/50	-	B	C	D	69	B	
14'	215/65R16	98H	-	8.3	6 1/2J	221	686	750	1653	300/44	-	B	C	D	69	B	
14'	225/55R16	95H	-	8.3	7J	233	654	690	1521	300/44	-	B	C	D	70	B	
14'	225/60R16	98H	-	8.3	6 1/2J	228	676	750	1653	300/44	-	B	C	D	70	B	
14'	225/65R16	100T	-	8.3	6 1/2J	228	698	800	1764	300/44	-	B	C	D	70	B	
14'	205/40R17	84VXL	-	8.3	7 1/2J	212	596	500	1102	340/50	-	B	C	D	69	B	
14'	205/45R17	88VXL	-	8.3	7J	206	616	560	1235	340/50	-	B	C	D	69	B	
14'	205/50R17	93HXL	-	8.3	6 1/2J	214	638	650	1433	340/50	-	B	C	D	69	B	
14'	205/55R17	95HXL	-	8.3	6 1/2J	214	658	690	1521	340/50	-	B	C	D	69	B	
14'	215/40R17	87VXL	-	8.3	7 1/2J	218	604	545	1201	340/50	-	B	C	D	69	B	
14'	215/45R17	91VXL	-	8.3	7J	213	626	615	1356	340/50	-	B	C	D	69	B	
14'	215/50R17	95HXL	-	8.3	7J	226	648	690	1521	340/50	-	B	C	D	69	B	
14'	215/55R17	98VXL	-	8.3	7J	226	668	750	1653	340/50	-	B	C	D	69	B	
14'	225/45R17	94VXL	-	8.3	7 1/2J	225	634	670	1477	340/50	-	B	C	D	70	B	
14'	225/50R17	98HXL	-	8.3	7J	233	658	750	1653	340/50	-	B	C	D	70	B	
14'	225/55R17	101HXL	-	8.3	7J	233	680	825	1819	340/50	-	B	C	D	70	B	
14'	235/45R17	97HXL	-	8.5	8J	236	644	730	1609	340/50	-	B	C	D	70	B	
14'	235/55R17	103HXL	-	8.5	7 1/2J	245	690	875	1929	340/50	-	B	C	D	70	B	
14'	245/40R17	95VXL	-	8.5	8 1/2J	248	828	690	1521	340/50	-	B	C	D	70	B	
14'	245/45R17	99VXL	-	8.5	8J	243	652	775	1709	340/50	-	B	C	D	70	B	
14'	215/45R18	93VXL	-	8.3	7J	213	651	650	1433	340/50	-	B	C	D	69	B	
14'	215/55R18	99HXL	-	8.3	7J	226	693	775	1709	340/50	-	B	C	D	69	B	
14'	225/40R18	92HXL	-	8.3	8J	230	637	630	1389	340/50	-	B	C	D	70	B	
14'	225/45R18	95HXL	-	8.3	7 1/2J	225	659	690	1521	340/50	-	B	C	D	70	B	
14'	225/50R18	99HXL	-	8.3	7J	233	683	775	1709	340/50	-	B	C	D	70	B	
14'	225/55R18	98H	-	8.3	7J	233	705	750	1653	300/44	-	B	C	D	70	B	
14'	235/40R18	95VXL	-	8.5	8 1/2J	241	645	690	1521	340/50	-	B	C	D	70	B	
14'	235/45R18	98HXL	-	8.5	8J	236	669	750	1653	340/50	-	B	C	D	70	B	
14'	235/50R18	97V	-	8.5	7 1/2J	245	693	730	1609	300/44	-	B	C	D	70	B	
14'	235/55R18	104HXL	-	8.5	7 1/2J	245	715	900	1984	340/50	-	B	C	D	70	B	
14'	245/40R18	97VXL	-	8.5	8 1/2J	248	853	730	1609	340/50	-	B	C	D	70	B	
14'	245/45R18	100HXL	-	8.5	8J	243	677	800	1764	340/50	-	B	C	D	70	B	
14'	245/50R18	104HXL	-	8.5	7 1/2J	253	703	900	1984	340/50	-	B	C	D	70	B	
14'	255/40R18	99HXL	-	8.5	9J	260	661	775	1709	340/50	-	B	C	D	70	B	
14'	225/45R19	99V	-														




**HOT**

# WINTERXPRO 999



Performance test:



**M+S**

RIM SIZE	18 - 22
SERIES	35 - 55
SPEED RATING	H - V



Excellent wet handling and wet braking performance.


Progressive and responsive handling in dry conditions.

Improved handling on snow surfaces and reduce the braking distance in all winter driving condition. Improve traction, lateral force during cornering, slalom and lane change situations.

Lower fuel consumption and maximum grip both on snow and wet road condition.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg)	Max Pressure (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall	0-60	0-100	Noise	dB
18'	255/55R18	109HXL	-	8.5	8J	265	737	1030	2271	340/50	-	B	C	D	70	B
	265/35R18	97VXL	-	8.5	9 1/2J	271	643	730	1609	340/50	-	B	C	D	70	B
	245/55R18	107HXL	-	8.5	7 1/2J	253	753	975	2149	340/50	-	B	C	D	70	B
	255/50R19	107HXL	-	8.5	8J	265	739	975	2149	340/50	-	B	C	D	70	B
	255/55R19	111HXL	-	8.5	8J	265	763	1090	2403	340/50	-	B	C	D	70	B
19'	275/35R19	100VXL	-	8.5	9 1/2J	278	675	800	1764	340/50	-	B	C	D	71	B
	275/40R19	105VXL	-	8.5	9 1/2J	278	703	925	2039	340/50	-	B	C	D	71	B
	285/45R19	111HXL	-	8.5	9 1/2J	285	739	1090	2403	340/50	-	B	C	D	71	B
	255/50R20	109HXL	-	8.5	8J	265	764	1030	2271	340/50	-	B	C	D	70	B
	255/55R20	110HXL	-	8.5	8J	265	788	1060	2337	340/50	-	B	C	D	70	B
20'	265/45R20	108HXL	-	8.5	9J	266	746	1000	2205	340/50	-	B	C	D	70	B
	275/35R20	102HXL	-	8.5	9 1/2J	278	700	850	1874	340/50	-	B	C	D	71	B
	275/40R20	106HXL	-	8.5	9 1/2J	278	728	950	2094	340/50	-	B	C	D	71	B
	275/45R20	110HXL	-	8.5	9J	273	756	1060	2337	340/50	-	B	C	D	71	B
	275/50R20	113HXL	-	8.5	8 1/2J	284	784	1150	2535	340/50	-	B	C	D	71	B
21'	275/55R20	1175XL	-	8.5	8 1/2J	284	810	1285	2833	340/50	-	B	C	D	71	B
	285/50R20	116HXL	-	8.5	9J	297	794	1250	2756	340/50	-	B	C	D	71	B
	305/40R20	112HXL	-	8.5	11J	313	752	1120	2469	340/50	-	B	C	D	71	B
	315/35R20	110VXI	-	8.5	11J	320	728	1060	2337	340/50	-	B	C	D	71	B
	265/45R21	108HXL	-	8.5	9J	266	771	1000	2205	340/50	-	B	C	D	71	B
22'	275/40R21	107HXL	-	8.5	9 1/2J	278	753	975	2149	340/50	-	B	C	D	71	B
	275/45R21	110HXL	-	8.5	9J	273	781	1060	2337	340/50	-	B	C	D	71	B
	275/50R21	113HXL	-	8.5	8 1/2J	284	809	1150	2535	340/50	-	B	C	D	71	B
	285/40R21	109HXL	-	8.5	10J	290	761	1030	2271	340/50	-	B	C	D	71	B
	295/35R21	107HXL	-	8.5	10 1/2J	301	739	975	2149	340/50	-	B	C	D	71	B
22'	295/40R21	111HXL	-	8.5	10 1/2J	301	769	1090	2403	340/50	-	B	C	D	71	B
	315/35R21	111HXL	-	8.5	11J	320	753	1090	2403	340/50	-	B	C	D	71	B
	315/40R21	115HXL	-	8.5	11J	320	785	1215	2679	340/50	-	B	C	D	71	B
	275/40R22	107HXL	-	8.5	9 1/2J	278	779	975	2149	340/50	-	B	C	D	71	B


# SNOWROVER 989



## M+S

RIM SIZE	14 - 16
SERIES	60 - 75
SPEED RATING	R - T

Performance test:



**The tacit connection of the longitudinal and transverse grooves complemented by a fine and tortuous sipe design**  
Effective elimination of snow and better grip to greatly increase the adhesion to ice and snow, eliminate hydroplaning and improve mud & snow shedding and self-cleaning performance.

**Special compound design for winter pattern**  
Improve the traction and grip of winter tires on snow and ice.




**Combination design of shoulder blocks and special sipe**  
Effectively equalize the rigidity of the block to ensure excellent turning performance and handling; combined design of the block and the sipe to significantly increase the number of lateral grooves without affecting the overall rigidity of the block. More and further balanced contact area on the snow and ice road for better braking performance.


**Optimized contour design and material structure distribution**  
Provides smooth operation and even pressure distribution.

Inch	Size	LI/SR	P.R.	Tread Depth		SW	OD	Max Load		Max Pressure	UTQG	Sidewall	Treadwear	Traction	Noise	
				(mm)	Rim			(kg)	(LBS)							(kPa/PSI)
14'	165/70R14C	89/87R	6PR	8.2	51	170	588	580/545	1279/1202	375/54	-	B	D	C	71	B
	175/65R14C	90/88T	6PR	8.2	51	177	584	600/560	1323/1235	375/54	-	B	D	C	71	B
	175/70R14C	95/93T	6PR	8.2	51	177	602	690/650	1521/1433	375/54	-	B	D	C	71	B
	175R14C	99/97R	8PR	8.5	51	177	636	775/730	1709/1609	450/65	-	B	D	C	71	B
	185R14C	102/100R	8PR	8.5	5 1/2	188	650	850/800	1874/1764	450/65	-	B	D	C	71	B
	195/70R15C	104/102R	8PR	8.8	61	201	655	900/850	1984/1874	450/65	-	B	D	C	71	B
15'	205/70R15C	106/104R	8PR	8.8	61	209	669	950/900	2094/1984	450/65	-	B	D	C	71	B
	215/65R15C	104/102R	6PR	8.8	6 1/2	221	661	900/850	1984/1874	375/54	-	B	D	C	72	B
	215/70R15C	109/107R	8PR	8.8	6 1/2	221	683	1030/975	2271/2149	450/65	-	B	C	C	72	B
	225/70R15C	112/110R	8PR	8.8	6 1/2	228	697	1120/1060	2469/2337	450/65	-	B	C	C	72	B
	175/75R16C	98/96R	6PR	8.2	51	177	668	750/710	1653/1565	375/54	-	B	D	C	71	B
	185/75R16C	104/102R	8PR	8.8	51	184	684	900/850	1984/1874	475/69	-	B	D	C	71	B
16'	195/60R16C	99/97H	6PR	8.5	61	201	640	775/730	1709/1609	375/54	-	B	D	C	71	B
	195/65R16C	104/102R	8PR	8.8	61	201	660	900/850	1984/1874	475/69	-	B	D	C	71	B
	195/75R16C	107/105R	8PR	8.8	5 1/2	196	698	975/925	2149/2039	475/69	-	B	D	C	71	B
	205/65R16C	107/105R	8PR	8.8	61	209	672	975/925	2149/2039	475/69	-	B	D	C	71	B
	205/75R16C	110/108R	8PR	8.5	5 1/2	203	714	1060/1000	2337/2204	475/69	-	B	D	C	71	B
	215/60R16C	103/101T	6PR	8.8	6 1/2	221	664	875/825	1929/1819	375/54	-	B	C	C	72	B
	215/65R16C	109/107R	8PR	8.8	6 1/2	221	686	1030/975	2271/2149	475/69	-	B	C	C	72	B
	215/75R16C	113/111R	8PR	8.8	61	216	728	1150/1090	2535/2403	475/69	-	B	C	C	72	B
	225/65R16C	112/110R	8PR	8.8	6 1/2	228	698	1120/1060	2469/2337	475/69	-	B	C	C	72	B
	225/75R16C	116/114R	8PR	8.8	61	223	744	1250/1180	2756/2601	475/69	-	B	C	C	72	B
235/65R16C	115/113R	8PR	8.8	71	240	712	1215/1150	2679/2535	475/69	-	B	C	C	72	B	

# SNOWROVER 966



Performance test:



## M+S

RIM SIZE	13 - 17
SERIES	45 - 80
SPEED RATING	T - H

**Cuneiform pattern**  
Cuneiform pattern design. Small angle cuneiform block inside provide great anti-slip ability and traction ability.

**3D slips**  
Updated 3D slip design ensures the max driving grip ability when the grooves contact the ice road, and remain the rigidity of block when the grooves close. Improve the driving stability and safety.



**3D shoulder**  
3D shoulder design enlarges the contact area and removes the snow on shoulder through ladder structure in rolling period.

**Zgrooves**  
"Z" groove design at the outside improve snow melt ability and ice grip.


Inch	Size	LI/SR	P.R.	Tread Depth	Std.	SW	OD	Max Load		Max Pressure	UTQG	Sidewall	0	0	Noise	A
				(mm)	Rim	(mm)	(mm)	(kg)	(LBS)	(kPa/PSI)						
13'	155/65R13	73T	-	8.4	4.50B	157	532	365	805	300/44	-	B	D	D	69	B
	155/80R13	79T	-	9	4.50B	157	578	437	963	300/44	-	B	D	D	69	B
	165/70R13	79T	-	9	5.00B	170	562	437	963	300/44	-	B	D	D	69	B
	175/70R13	82T	-	9	5.00B	177	576	475	1047	300/44	-	B	D	D	69	B
	165/60R14	75T	-	9	5J	170	554	387	853	300/44	-	B	D	D	69	B
14'	175/65R14	82T	-	9	5J	177	584	475	1047	300/44	-	B	D	D	69	B
	175/70R14	88T	-	8	5J	177	602	500	1102	340/44	-	B	D	D	69	B
	185/60R14	82T	-	9	5 1/2J	189	578	475	1047	300/44	-	B	D	D	69	B
	185/65R14	86T	-	9	5 1/2J	189	596	530	1168	300/44	-	B	D	D	69	B
	185/70R14	92T	-	9	5 1/2J	189	616	560	1235	340/44	-	B	C	D	69	B
	195/70R14	95T	-	8.8	6J	201	630	615	1356	340/44	-	B	C	D	69	A
	185/55R15	82H	-	9	6J	194	585	475	1047	300/44	-	B	D	D	69	B
	185/60R15	88H	-	9	5 1/2J	189	603	500	1102	300/44	-	B	D	D	69	B
	185/65R15	88H	-	9	5 1/2J	189	621	560	1235	300/44	-	B	D	D	69	B
	195/50R15	82H	-	9	6J	201	577	475	1047	300/44	-	B	D	D	69	A
15'	195/55R15	85H	-	9	6J	201	595	515	1135	300/44	-	B	D	D	69	A
	195/60R15	88H	-	8	6J	201	615	560	1235	300/44	-	B	D	D	69	A
	195/65R15	91H	-	8.8	6J	201	635	615	1356	300/44	-	B	C	D	69	A
	205/65R15	94H	-	9.5	6J	209	647	670	1477	300/44	-	B	C	D	69	A
	205/55R16	91H	-	7.5	6 1/2J	214	632	615	1356	300/44	-	B	C	D	69	A
	205/60R16	96H	-	9.5	6J	209	652	630	1389	340/44	-	B	C	D	69	A
	215/60R16	99H	-	9.5	6 1/2J	221	664	690	1521	340/44	-	B	C	D	69	A
	215/65R16	98H	-	9.5	6 1/2J	221	686	750	1653	300/44	-	B	C	D	69	A
	225/55R16	99H	-	9.5	7J	233	654	690	1521	300/44	-	B	C	D	69	A
	225/60R16	98H	-	9.5	6 1/2J	228	676	750	1653	300/44	-	B	C	D	69	A
16'	235/70R16	106T	-	9.5	7J	240	736	950	2094	300/44	-	B	C	D	69	A
	225/45R17	94H	-	9.5	7 1/2J	225	634	670	1477	340/50	-	B	C	D	69	A
	225/65R17	102T	-	9.5	6 1/2J	228	724	850	1874	300/44	-	B	C	D	69	A

# SNOWROVER 868




### M+S

RIM SIZE	13 - 20
SERIES	35 - 70
SPEED RATING	T - V



#### Performance test:



**Steel hook design**  
Central hook-like blocks ensure the horizontal rigidity driving on dry and wet road conditions. The hook-like design enhances great performance on both horizontal rigidity and handling experience.

**Zigzag steel sheets**  
Zigzag steel sheets design. 3D Densely zigzag steel sheets design increase anti-skip ability on ice road.

**Zigzag grooves**  
Zigzag vertical grooves design reduces the snows in the grooves and builds the effect of meshing between tyre and snow. Ensure the riding safety through pressing and removing snow by rolling.

**Flash ribs**  
Flash ribs design provide excellent handling and braking performance, increase the traction ability on ice road.

Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim	SW (mm)	OD (mm)	Max Load (kg) (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall	0	Q	Noise	dB
13'	155/65R13	73T	-	7.7	4.50B	157	532	365 805	300/44	-	B	D	C	69	B
	155/70R13	75T	-	7.6	4.1/2J	157	548	387 853	300/44	-	B	D	C	69	B
	165/70R13	79T	-	7.7	5.00B	170	562	437 963	300/44	-	B	D	C	69	B
	155/65R14	75T	-	7.6	4.1/2J	157	558	387 853	300/44	-	B	D	C	69	B
	165/65R14	79T	-	7.6	5.1	170	570	437 963	300/44	-	B	D	C	69	B
14'	165/70R14	85TXL	-	7.6	5J	170	588	515 1135	340/50	-	B	D	C	69	B
	175/70R14	88T	-	8	5J	177	602	560 1235	340/50	-	B	D	C	69	B
	185/60R14	82T	-	8	5.1/2J	189	578	475 1047	300/44	-	B	D	C	69	B
	185/65R14	86H	-	8	5.1/2J	189	596	530 1168	300/44	-	B	D	C	69	B
	195/60R14	86H	-	8.3	6J	201	590	530 1168	300/44	-	B	D	C	69	A
15'	175/65R15	84T	-	7.6	5J	177	609	500 1102	300/44	-	B	D	C	69	B
	185/60R15	84H	-	8	5.1/2J	189	603	500 1102	300/44	-	B	D	C	69	B
	185/65R15	88H	-	8	5.1/2J	189	621	560 1235	300/44	-	B	D	C	69	B
	195/55R15	85V	-	8.3	6J	201	595	515 1135	300/44	-	B	D	C	69	A
	195/60R15	88H	-	8.3	6J	201	615	560 1235	300/44	-	B	D	C	69	A
16'	195/65R15	95T	-	8.3	6J	201	635	690 1521	340/50	-	B	C	C	70	B
	205/65R15	94H	-	8.3	6J	209	647	670 1477	300/44	-	B	C	C	70	B
	215/70R15	98T	-	8	6.1/2J	221	683	750 1653	300/44	-	B	C	C	70	B
	195/55R16	91H XL	-	9	6J	201	620	615 1356	340/50	-	B	C	C	70	B
	195/60R16	89H	-	8	6J	201	640	580 1279	300/44	-	B	C	C	70	B
17'	205/55R16	91H	-	8.3	6.1/2J	214	632	615 1356	300/44	-	B	C	C	70	B
	205/55R16	94H	-	8.3	6.1/2J	214	632	670 1477	340/50	-	B	C	C	70	B
	205/60R16	96H	-	8.3	6J	209	652	710 1565	340/50	-	B	C	C	70	B
	215/55R16	97H XL	-	8	7J	226	642	730 1609	340/50	-	B	C	C	70	B
	215/60R16	99H	-	8.3	6.1/2J	221	664	775 1709	340/50	-	B	C	C	70	B
18'	215/70R16	100T	-	8	6.1/2J	221	708	800 1764	300/44	-	B	C	C	70	B
	225/70R16	107TXL	-	8	6.1/2J	228	722	975 2149	340/50	-	B	C	C	70	B
	235/60R16	100H	-	8.5	7J	240	688	800 1764	300/44	-	B	C	C	70	B
	245/70R16	111TXL	-	8	7J	248	750	1090 2403	340/50	-	B	C	C	71	B
	265/70R16	112T	-	8	8J	272	778	1120 2469	300/44	-	B	C	C	72	B
19'	205/50R17	93H XL	-	8	6.1/2J	214	638	650 1433	340/50	-	B	C	C	70	B
	215/50R17	95H XL	-	8	7J	226	648	690 1521	340/50	-	B	C	C	70	B
	215/55R17	98V	-	8.3	7J	226	668	750 1653	340/50	-	B	C	C	70	B
	215/60R17	96H	-	8.5	6.1/2J	221	690	710 1565	300/44	-	B	C	C	70	B
	225/50R17	98H XL	-	8	7J	233	658	750 1653	340/50	-	B	C	C	70	B
20'	225/55R17	101V	-	8.3	7J	233	680	825 1819	340/50	-	B	C	C	70	B
	225/60R17	99H	-	8.5	6.1/2J	228	702	775 1709	300/44	-	B	C	C	70	B
	235/45R17	97H XL	-	8	8J	236	644	730 1609	340/50	-	B	C	C	71	B
	235/55R17	103H XL	-	8	7.1/2J	245	690	875 1929	340/50	-	B	C	C	71	B
	235/60R17	102H	-	8.5	7J	240	714	850 1873	300/44	-	B	C	C	71	B
18'	235/65R17	108T XL	-	8	7J	240	738	1000 2205	340/50	-	B	C	C	71	B
	245/65R17	107S	-	8.5	7J	248	750	975 2149	300/44	-	B	C	C	71	B
	255/60R17	110TXL	-	8.5	7.1/2J	260	738	1060 2337	340/50	-	B	C	C	72	B
	265/65R17	112T	-	8	8J	272	776	1120 2469	300/44	-	B	C	C	72	B
	265/70R17	115T	-	8	8J	272	804	1215 2679	300/44	-	B	C	C	72	B
19'	225/40R18	92H XL	-	8	8J	230	637	630 1389	340/50	-	B	C	C	70	B
	225/45R18	95H XL	-	8	7.1/2J	225	659	690 1521	340/50	-	B	C	C	70	B
	235/45R18	98H XL	-	8	8J	236	669	750 1653	340/50	-	B	C	C	71	B
	225/60R18	104HXL	-	8.5	6.1/2J	228	727	900 1984	340/50	-	B	C	C	71	B
	235/60R18	107H XL	-	8	7J	240	739	975 2149	340/50	-	B	C	C	71	B
20'	245/40R18	97VXL	-	8	8.1/2J	248	653	730 1609	340/50	-	B	C	C	71	B
	245/45R18	100H XL	-	8	8J	243	677	800 1764	340/50	-	B	C	C	71	B
	245/60R18	105H	-	8.5	7J	248	751	925 2039	300/44	-	B	C	C	71	B
	255/55R18	109H XL	-	8	8J	265	737	1030 2271	340/50	-	B	C	C	72	B
	255/60R18	112TXL	-	8.5	7.1/2J	260	763	1120 2469	340/50	-	B	C	C	72	B
19'	265/60R18	110T	-	8.5	8J	272	775	1060 2337	300/44	-	B	C	C	72	B
	265/70R18	116S	-	8.5	8J	272	829	1250 2756	300/44	-	B	C	C	72	B
	285/60R18	116H	-	8	8.1/2J	292	799	1250 2756	300/44	-	B	C	C	73	B
	235/55R19	105HXL	-	8	7.1/2J	245	741	925 2039	340/50	-	B	C	C	71	B
	245/45R19	102HXL	-	8	8J	243	703	850 1874	340/50	-	B	C	C	71	B
20'	245/55R19	107HXL	-	8	7.1/2J	253	753	975 2149	340/50	-	B	C	C	71	B
	255/50R19	107HXL	-	8	8J	265	739	975 2149	340/50	-	B	C	C	72	B
	255/55R19	111HXL	-	8	8J	265	763	1090 2403	340/50	-	B	C	C	72	B
	255/45R20	105VXL	-	8	8.1/2J	255	738	925 2039	340/50	-	B	C	C	72	B
	275/40R20	106HXL	-	8	9.1/2J	278	728	950 2094	340/50	-	B	C	C	72	B
20'	275/45R20	110H XL	-	8	9J	273	756	1060 2337	340/50	-	B	C	C	72	B
	275/60R20	119HXL	-	8.5	8J	279	838	1360 2998	340/50	-	B	C	C	72	B
	315/35R20	110VXL	-	8.5	11J	320	728	1060 2337	340/50	-	B	C	C	74	B

**WINTER**




**PRIME A/S**



**VAN A/S**

# PRIME A/S

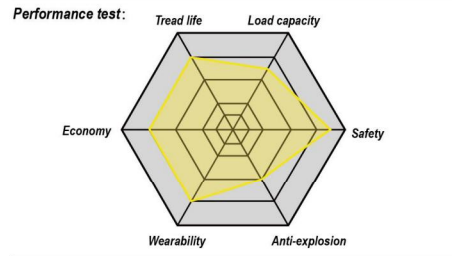

**M+S**

RIM SIZE	13 - 20
SERIES	35 - 80
SPEED RATING	T - W




- Unique directional, streamlined and radial pattern design**  
Increase the ability of water breaking to reduce hydroplaning, quickly eliminate the road water to improve the wet handling.
- Optimized tread pattern design**  
The pattern groove distribution and the optimized groove angle design reduce the tread pattern noise.
- Innovative Four Seasons Tread compound**  
Compound features high grip performance and high temperature resistance, and improve the grip under low temperature conditions.

- Streamlined lateral grooves supplemented by sipe design**  
The streamlined lateral groove improves drainage performance, ensures driving stability for better braking performance. Increased sipes ensure the heat dissipation performance along with good grip and traction.
- High rigidity shoulder design**  
Adjusted rigidity of the shoulder block to reach more balanced grounding pressure to handle problem of swaying and eccentric for more stable driving.


Inch	Size	LI/SR	P.R.	Tread Depth (mm)	Std. Rim (mm)	SW (mm)	OD (mm)	Max Load (kg)	Max Pressure (LBS)	Max Pressure (kPa/PSI)	UTQG	Sidewall	0	1	2	Noise	
13"	145/70R13	71T	-	6.6	4.508	150	534	345	761	300/44	420/A/A	B	D	C	C	69	B
	145/80R13	75T	-	6.6	4.008	145	562	387	853	300/44	420/A/A	B	D	C	C	69	B
	155/65R13	73T	-	6.6	4.508	157	532	365	805	300/44	420/A/A	B	D	C	C	69	B
	155/75R13	73T	-	6.6	4.008	157	548	387	853	300/44	420/A/A	B	D	C	C	69	B
	155/80R13	79T	-	6.6	4.508	157	578	437	963	300/44	420/A/A	B	D	C	C	69	B
	165/70R13	79T	-	6.8	5.008	170	562	437	963	300/44	420/A/A	B	D	C	C	69	B
	175/65R13	80T	-	6.8	5.008	177	558	450	992	300/44	420/A/A	B	D	C	C	69	B
	175/70R13	82T	-	6.8	5.1	177	576	475	1047	300/44	420/A/A	B	D	C	C	69	B
	155/65R14	75T	-	6.6	4.508	157	558	387	853	300/44	420/A/A	B	D	C	C	69	B
	165/60R14	75H	-	6.6	5.008	170	554	387	853	300/44	420/A/A	B	D	C	C	69	B
	165/65R14	79T	-	6.8	5.1	170	570	437	963	300/44	420/A/A	B	D	C	C	69	B
	175/70R14	81T	-	6.8	5.1	170	588	462	1019	300/44	420/A/A	B	D	C	C	69	B
175/75R14	82T	-	6.8	5.1	177	584	475	1047	300/44	420/A/A	B	D	C	C	69	B	
175/70R14	84T	-	6.8	5.1	177	602	500	1102	300/44	420/A/A	B	D	C	C	69	B	
175/70R14	88TL	-	6.8	5.1	177	602	560	1235	300/44	420/A/A	B	D	C	C	69	B	
175/80R14	88T	-	6.8	5.1	177	636	560	1235	300/44	420/A/A	B	D	C	C	69	B	
185/55R14	80H	-	6.8	6.1	194	560	450	992	300/44	420/A/A	B	D	C	C	69	B	
185/60R14	82H	-	6.8	5 1/2J	189	578	475	1047	300/44	420/A/A	B	D	C	C	69	B	
185/65R14	86H	-	6.8	5 1/2J	189	596	530	1168	300/44	420/A/A	B	D	C	C	69	B	
185/70R14	88H	-	6.8	5 1/2J	189	616	560	1235	300/44	420/A/A	B	D	C	C	69	B	
195/70R14	91H	-	7	6.1	201	630	615	1356	300/44	420/A/A	B	D	C	C	69	A	
165/60R15	81HXL	-	6.6	5.1	170	579	462	1019	340/50	420/A/A	B	D	C	C	69	B	
165/65R15	81T	-	6.8	5.1	170	595	462	1019	300/44	420/A/A	B	D	C	C	69	B	
175/55R15	77H	-	6.8	5 1/2J	182	573	412	908	300/44	420/A/A	B	D	C	C	69	B	
175/60R15	81H	-	6.8	5.1	177	591	462	1019	300/44	420/A/A	B	D	C	C	69	B	
175/65R15	84H	-	6.8	5.1	177	609	500	1102	300/44	420/A/A	B	D	C	C	69	B	
185/55R15	82H	-	6.8	6.1	194	585	475	1047	300/44	420/A/A	B	D	C	C	69	B	
185/60R15	84H	-	6.8	5 1/2J	189	603	500	1102	300/44	420/A/A	B	D	C	C	69	B	
188/60R15	84H	-	6.8	5 1/2J	189	603	500	1102	340/50	420/A/A	B	D	C	C	69	B	
185/65R15	92TL	-	6.8	5 1/2J	189	621	530	1189	340/50	420/A/A	B	D	C	C	69	B	
195/50R15	82V	-	7	6.1	201	577	475	1047	300/44	420/A/A	B	D	C	C	70	B	
195/55R15	85H	-	7	6.1	201	595	475	1047	300/44	420/A/A	B	D	C	C	70	B	
195/60R15	88H	-	7	6.1	201	615	560	1235	300/44	420/A/A	B	D	C	C	70	B	
195/65R15	91H	-	7	6.1	201	635	615	1356	300/44	420/A/A	B	D	C	C	70	B	
195/65R15	95WL	-	7	6.1	201	635	690	1521	340/50	420/A/A	B	D	C	C	71	B	
205/55R15	94V	-	7	6.1	209	647	670	1477	300/44	420/A/A	B	D	C	C	71	B	
215/65R15	96H	-	7	6 1/2J	221	661	710	1565	300/44	420/A/A	B	D	C	C	71	B	
195/45R16	84VXL	-	7	7	215	582	500	1102	340/50	420/A/A	B	D	C	C	71	B	
195/50R16	88VXL	-	7	7	203	602	560	1235	340/50	420/A/A	B	D	C	C	71	B	
195/55R16	91VXL	-	7	7	201	620	615	1356	340/50	420/A/A	B	D	C	C	71	B	
195/60R16	95H	-	7	7	201	640	580	1278	300/44	420/A/A	B	D	C	C	71	B	
205/45R16	87VXL	-	7	7	206	590	545	1201	340/50	420/A/A	B	D	C	C	71	B	
205/50ZR16	91VXL	-	7	6 1/2J	214	612	615	1356	340/50	420/A/A	B	D	C	C	71	B	
205/55R16	91H	-	7	6 1/2J	214	632	615	1356	300/44	420/A/A	B	D	C	C	71	B	
205/60R16	93V	-	7	6 1/2J	214	632	615	1356	300/44	420/A/A	B	D	C	C	71	B	
205/55R16	94VXL	-	7	6 1/2J	214	632	670	1477	340/50	420/A/A	B	D	C	C	71	B	
205/60R16	96VXL	-	7	7	209	652	710	1565	340/50	420/A/A	B	D	C	C	71	B	
215/45R16	90VXL	-	7	7	213	600	600	1323	340/50	420/A/A	B	D	C	C	71	B	
215/55R16	97VXL	-	7	7	226	642	730	1609	340/50	420/A/A	B	D	C	C	71	B	
215/60R16	99HXL	-	7	6 1/2J	221	664	775	1709	340/50	420/A/A	B	D	C	C	71	B	
215/65R16	102HXL	-	7	6 1/2J	221	686	850	1874	340/50	420/A/A	B	D	C	C	71	B	
215/70R16	108H	-	7	6 1/2J	221	708	900	1764	300/44	420/A/A	B	D	C	C	71	B	
235/55ZR16	99VXL	-	7	7	233	654	775	1709	340/50	420/A/A	B	D	C	C	71	B	
225/60R16	98H	-	7.2	6 1/2J	228	676	750	1653	300/44	420/A/A	B	D	C	C	71	B	
235/60R16	108H	-	7.2	7	240	688	800	1764	300/44	420/A/A	B	D	C	C	71	B	
205/40ZR17	84VXL	-	7	7 1/2J	212	596	500	1102	340/50	420/A/A	B	D	C	C	71	B	
205/45ZR17	88VXL	-	7	7	206	616	560	1235	340/50	420/A/A	B	D	C	C	71	B	
205/50ZR17	93VXL	-	7	6 1/2J	214	638	650	1433	340/50	420/A/A	B	D	C	C	71	B	
205/55ZR17	95VXL	-	7	6 1/2J	214	658	690	1521	340/50	420/A/A	B	D	C	C	71	B	
215/40ZR17	87VXL	-	7	7 1/2J	218	604	545	1201	340/50	420/A/A	B	D	C	C	71	B	
215/45ZR17	91VXL	-	7	7 1/2J	218	626	565	1256	340/50	420/A/A	B	D	C	C	71	B	
215/50ZR17	95VXL	-	7.2	7	226	648	690	1521	340/50	420/A/A	B	D	C	C	71	B	
215/55ZR17	98VXL	-	7	7 1/2J	226	668	750	1653	340/50	420/A/A	B	D	C	C	71	B	
215/60R17	98H	-	7	6 1/2J	221	690	710	1565	300/44	420/A/A	B	D	C	C	71	B	
215/65R17	99T	-	7	6 1/2J	221	712	775	1709	300/44	420/A/A	B	D	C	C	71	B	
225/45ZR17	94VXL	-	7.2	7 1/2J	225	634	670	1477	340/50	420/A/A	B	D	C	C	71	B	
225/50ZR17	98VXL	-	7.2	7 1/2J	225	658	750	1653	340/50	420/A/A	B	D	C	C	71	B	
225/55ZR17	101VXL	-	7.2	7 1/2J	225	680	825	1819	340/50	420/A/A	B	D	C	C	71	B	
225/60R17	99H	-	7	6 1/2J	228	702	775	1709	300/44	420/A/A	B	D	C	C	71	B	
225/65R17	106HXL	-	7.2	6 1/2J	228	724	950	2094	340/50	420/A/A	B	D	C	C	71	B	
235/45ZR17	97VXL	-	7.2	7 1/2J	245	644	730	1609	340/50	420/A/A	B	D	C	C	71	B	
235/55ZR17	103VXL	-	7.2	7 1/2J	245	690	875	1929	340/50	420/A/A	B	D	C	C	71	B	
235/65R17	108HXL	-	7.2	7 1/2J	245	738	1000	2205	340/50	420/A/A	B	D	C	C	71	B	
245/45ZR17	99VXL	-	7.2	8	243	652	775	1709	340/50	420/A/A	B	D	C	C	71	B	
255/60R17	110HXL	-	7.2	7 1/2J	260	738	1060	2337	340/50	420/A/A	B	D	C	C	72	B	
215/55R18	99VXL	-	7.2	7 1/2J	226	693	775	1709	340/50	420/A/A	B	D	C	C	71	B	
225/40ZR18	92VXL	-	7.2	8	230	637	630	1389	340/50	420/A/A	B	D	C	C	71	B	
225/45ZR18	95VXL	-	7.2	7 1/2J	225	659	690	1521	340/50	420/A/A	B	D	C	C	71	B	
225/50ZR18	99VXL	-	7.2	7 1/2J	225	683	775	1709	340/50	420/A/A	B	D	C	C	71	B	
225/55R18	98V	-	7.2	7 1/2J	223	705	750	1653	300/44	420/A/A	B	D	C	C	71	B	
235/40ZR18	95VXL	-	7.2	8 1/2J	241	645	690	1521	340/50	420/A/A	B	D	C	C	72	B	
235/45ZR18	98VXL	-	7.2	8	236	669	750	1653	340/50	420/A/A	B	D	C	C	72	B	
235/50ZR18	101VXL	-	7.2	7 1/2J	245	693	825	1819	340/50	420/A/A	B	D	C	C	72	B	
235/55R18	104VXL	-	7.2	7 1/2J	245	715	900	1984	340/50	420/A/A	B						

# VAN A/S



## M+S

RIM SIZE	14 - 17
SERIES	60 - 75
SPEED RATING	R - H

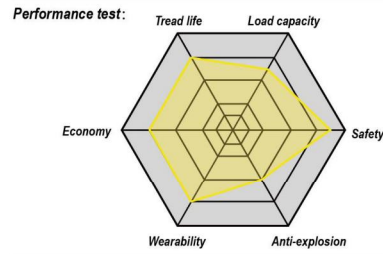

**Three stepped longitudinal main groove design**  
Excellent drainage performance and firm grip on wet and dry roads.

**Unique design of the block and the high-density sipe**  
Ensure the good heat dissipation of the block with great grip and traction.

**Wide shoulder block design**  
Improve the robustness of the block and the durability and load capacity of the tire; enhance the steering performance.




**Low noise pattern design**  
Close shoulder effectively prevents the noise spread; the tuned pattern extends to the rear of the shoulders to allow for even wear and further noise elimination.


**Innovative four-season tread compound**  
Compound features high grip performance and high temperature resistance, and improves the grip under low temperature Conditions.

Inch	Size	LI/SR	P.R.	Tread Depth		SW	OD	Max Load		Max Pressure	UTQG	Sidewall	Treadwear	Traction	Noise	
				(mm)	Rim			(kg)	(LBS)							(kPa/PSI)
14'	175/65R14C	90/88T	6PR	8	5	177	584	600/560	1323/1235	375/54	-	B	D	C	71	B
	175/70R14C	95/93T	6PR	8	5	177	602	690/650	1521/1433	375/54	-	B	D	C	71	B
	195/70R15C	104/102R	8PR	8	6	201	655	900/850	1984/1874	450/65	-	B	C	C	71	B
15'	205/70R15C	106/104R	8PR	8	6	209	669	950/900	2094/1984	450/65	-	B	C	C	71	B
	215/70R15C	109/107R	8PR	8.5	6.5	221	683	1030/975	2271/2149	450/65	-	B	C	C	72	B
	225/70R15C	112/110R	8PR	8.5	6.5	228	697	1120/1060	2469/2337	450/65	-	B	C	C	72	B
	185/75R16C	104/102R	8PR	8	5	184	684	900/850	1984/1874	475/69	-	B	C	C	71	B
	195/60R16C	99/97H	6PR	8	6	201	640	775/730	1709/1609	375/54	-	B	D	C	71	B
	195/65R16C	104/102T	8PR	8	6	201	660	900/850	1984/1874	475/69	-	B	C	C	71	B
16'	195/75R16C	107/105R	8PR	8	5.5	196	698	975/925	2149/2039	475/69	-	B	C	C	71	B
	205/65R16C	107/105T	8PR	8	6	209	672	975/925	2149/2039	475/69	-	B	C	C	71	B
	205/75R16C	113/111R	10PR	8	5.5	203	714	1150/1090	2535/2403	525/76	-	B	C	C	71	B
	215/60R16C	103/101T	6PR	8.5	6.5	221	664	875/825	1929/1819	375/54	-	B	C	C	72	B
	215/65R16C	109/107T	8PR	8.5	6.5	221	686	1030/975	2271/2149	475/69	-	B	C	C	72	B
	215/75R16C	113/111R	8PR	8.5	6	216	728	1150/1090	2535/2403	475/69	-	B	C	C	72	B
17'	225/65R16C	112/110R	8PR	8.5	6.5	228	698	1120/1060	2469/2337	475/69	-	B	C	C	72	B
	225/75R16C	121/120R	10PR	8.5	6	223	744	1450/1400	3197/3086	575/83	-	B	C	C	72	B
	235/65R16C	115/113R	8PR	8.5	7	240	712	1215/1150	2679/2535	475/69	-	B	C	C	72	B
17'	215/60R17C	109/107T	8PR	8.5	6.5	221	690	1030/975	2271/2149	475/69	-	B	C	C	72	B

# CERTIFICATES



1 ISO14001



2 BIS



3 CCC



4 ECE



5 SASO



6 GCC



7 SGS



8 SONCAP

# EXHIBITIONS



# Tyre Sidewall descriptions



Tire brand name

Actual number of plies

Tire size designation

Max load and tire pressure marking

DOT code

Tire pattern name

## Speed

Speed symbol indicates the maximum travel speed that the tire can achieve understated condition.

SS	Maximum Speed (km/h)
L	120
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
*ZR	over 240km/h

\*ZR means ace tain range of speed

Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

## Loading Index

Load index refers to numeral value of tire's maximum load ability understated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
		387					